

COMPOSITE SHEDS Pent Shed Assembly Manual

compositesheds.co.uk

Pressure Treated Tanalised Timber for Longer Lasting Life!

Ready To Build - 10ft Range

Composite Sheds
1 Birmingham Rd
West Bromwich, B71 4JH
Tel: 0121 798 3234
Email: info@compositesheds.co.uk

Version 1.5

Thank you for purchasing your Total Shed.

All of our sheds are made from only the finest selected timber which are (Tanalised), specially pressure treated for a longer and lasting durable life span to the elements.

Each shed is carefully packed and delivered on a pallet ready to be assembled.

**FEATURES NEW FLEXIBLE,
INTER-CHANGEABLE DESIGN
FOR YOUR INDIVIDUAL STYLE.**

2 Persons Recommended for Assembling Shed

Tools Required:



DRILL DRIVER



HAMMER



HAND SAW

PLEASE NOTE: Use extreme caution when using any tools. Always wear safety gear where necessary. It is advisable that at least 2 or more persons assemble the shed for health and safety purposes. We are not responsible for any injuries caused whilst assembling this shed.

Ready to Build Shed



**DELIVERED FLAT PACKED IN
EASY TO INSTALL SECTIONS**

Featured Build of the Pent 6ft x 10ft Shed
Includes 4x10ft to 20x10ft Instructions

www.Compositesheds.co.uk

Check List: See your shed size for details.
Your delivery should contain the following:

FEATURES NEW FLEXIBLE, INTER-CHANGEABLE DESIGN FOR YOUR INDIVIDUAL STYLE.

If your thinking of mixing it up then just a few key points to bare in mind.

All 4ft panels can be placed in any order but 2ft panels must always be tted on far left of shed build. Take a few moments to study the manual and how your shed should look after each step.

10ft Range

4ft x 10ft Pent Shed

- x3 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x5)
- x2 Floor (4x5)
- x6 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x1 Pent Roof Top (4ft)
- x4 Joining Strips
- x4 Corner Strips
- x7 Posts
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (5ft)
- x1 Instruction Manual



Checked and Signed by:

5ft x 10ft Pent Shed

- x2 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x4 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel (3ft)
- x2 Pent Roof (3x5)
- x2 Pent Roof (2x5)
- x2 Floor (3x5)
- x2 Floor (2x5)
- x4 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x1 Pent Roof Top (3ft)
- x1 Pent Roof Top (2ft)
- x6 Joining Strips
- x4 Corner Strips
- x12 Posts
- x2 Diamond Caps

- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (6ft)
- x1 Instruction Manual



Checked and Signed by:

6ft x 10ft Pent Shed

- x3 Blank (4ft Wide)
- x4 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x5)
- x2 Pent Roof (2x5)
- x2 Floor (4x5)
- x2 Floor (2x5)
- x6 Felt Strips (4ft Wide)
- x4 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x1 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x6 Joining Strips
- x4 Corner Strips
- x13 Posts
- x2 Diamond Caps

- x1 Roof Rubber (7ft)
- x1 Instruction Manual
- x1 Fixing Kit
(Found in the polytube pack)



Checked and Signed by:

7ft x 10ft Pent Shed

- x3 Blank (4ft Wide)
- x2 Blank (3ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x5)
- x2 Pent Roof (3x5)
- x2 Floor (4x5)
- x2 Floor (3x5)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x1 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x10 Corner Strips
- x14 Posts
- x2 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (8ft)

- x1 Instruction Manual



Checked and Signed by:

8ft x 10ft Pent Shed

- x6 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x5)
- x4 Floor (4x5)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x2 Pent Roof Top (4ft)
- x6 Joining Strips
- x4 Corner Strips
- x14 Posts
- x2 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (9ft)
- x1 Instruction Manual



Checked and Signed by:

9ft x 10ft Pent Shed



- x5 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x4 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel (3ft Wide)
- x2 Pent Roof (4x5)
- x2 Pent Roof (3x5)
- x2 Pent Roof (2x5)
- x2 Floor (4x5)
- x2 Floor (3x5)
- x2 Floor (2x5)
- x6 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x1 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x1 Pent Roof Top (2ft)
- x8 Joining Strips
- x4 Corner Strips
- x19 Posts
- x4 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (10ft)
- x1 Instruction Manual



Checked and Signed by:

10ft x 10ft Pent Shed



- x6 Blank (4ft Wide)
- x4 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x5)
- x2 Pent Roof (2x5)
- x4 Floor (4x5)
- x2 Floor (2x5)
- x8 Felt Strips (4ft Wide)
- x4 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x2 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x8 Joining Strips
- x4 Corner Strips
- x20 Posts
- x4 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (11ft)
- x1 Instruction Manual



Checked and Signed by:

11ft x 10ft Pent Shed



- x6 Blank (4ft Wide)
- x2 Blank (3ft Wide)
- x2 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x5)
- x2 Pent Roof (3x5)
- x4 Floor (4x5)
- x2 Floor (3x5)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x2 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x8 Corner Strips
- x4 Corner Strips
- x21 Posts
- x4 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Instruction Manual
- x1 Roof Rubber (12ft)



Checked and Signed by:

12ft x 10ft Pent Shed



- x7 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x6 Pent Roof (4x5)
- x6 Floor (4x5)
- x10 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x3 Pent Roof Top (4ft)
- x8 Joining Strips
- x4 Corner Strips
- x21 Posts
- x4 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (13ft)
- x1 Instruction Manual



Checked and Signed by:

13ft x 10ft Pent Shed



- x6 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x4 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Window Panel (3ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x5)
- x2 Pent Roof (3x5)
- x2 Pent Roof (2x5)
- x4 Floor (4x5)
- x2 Floor (3x5)
- x2 Floor (2x5)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x2 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x1 Pent Roof Top (2ft)
- x10 Joining Strips
- x4 Corner Strips
- x26 Posts
- x6 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (14ft)
- x1 Instruction Manual



Checked and Signed by:

14ft x 10ft Pent Shed



- x7 Blank (4ft Wide)
- x4 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x6 Pent Roof (4x5)
- x2 Pent Roof (2x5)
- x6 Floor (4x5)
- x2 Floor (2x5)
- x10 Felt Strips (4ft Wide)
- x4 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x3 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x10 Joining Strips
- x4 Corner Strips
- x26 Posts
- x6 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (15ft)
- x1 Instruction Manual



Checked and Signed by:

15ft x 10ft Pent Shed


- x7 Blank (4ft Wide)
 - x2 Blank (3ft Wide)
 - x2 Blank (2ft Wide)
 - x2 Window Panel (4ft Wide)
 - x1 Single Door Panel
 - x6 Pent Roof (4x5)
 - x2 Pent Roof (3x5)
 - x6 Floor (4x5)
 - x2 Floor (3x5)
 - x10 Felt Strips (4ft Wide)
 - x2 Felt Strips (3ft Wide)
 - x2 Felt Strips (2ft Wide)
 - x4 Floor Blocks (5ft Wide)
 - x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
 - x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
 - x3 Pent Roof Top (4ft)
 - x1 Pent Roof Top (3ft)
 - x10 Joining Strips
 - x4 Corner Strips
 - x28 Posts
 - x6 Diamond Caps
- x1 Instruction Manual
 - x1 Fixing Kit
(Found in the polytube pack)
 - x1 Roof Rubber (16ft)



Checked and Signed by:

16ft x 10ft Pent Shed

- x8 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x3 Window Panel (4ft Wide)
- x1 Single Door Panel
- x8 Pent Roof (4x5)
- x8 Floor (4x5)
- x12 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (5ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x4 Pent Roof Top (4ft)
- x10 Joining Strips
- x4 Corner Strips
- x28 Posts
- x6 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (17ft)
- x1 Instruction Manual

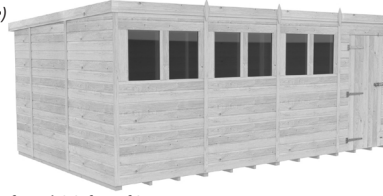

Checked and Signed by:

17ft x 10ft Pent Shed

- x7 Blank (4ft Wide)
 - x1 Blank (3ft Wide)
 - x4 Blank (2ft Wide)
 - x2 Window Panel (4ft Wide)
 - x1 Window Panel (3ft Wide)
 - x1 Single Door Panel
 - x6 Pent Roof (4x5)
 - x2 Pent Roof (3x5)
 - x2 Pent Roof (2x5)
 - x6 Floor (4x5)
 - x2 Floor (3x5)
 - x2 Floor (2x5)
 - x10 Felt Strips (4ft Wide)
 - x2 Felt Strips (3ft Wide)
 - x4 Felt Strips (2ft Wide)
 - x4 Floor Blocks (5ft Wide)
 - x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
 - x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
 - x3 Pent Roof Top (4ft)
 - x1 Pent Roof Top (3ft)
 - x1 Pent Roof Top (2ft)
 - x12 Joining Strips
 - x4 Corner Strips
- x33 Posts
 - x8 Diamond Caps
 - x1 Fixing Kit
(Found in the polytube pack)
 - x1 Roof Rubber (18ft)
 - x1 Instruction Manual



Checked and Signed by:

18ft x 10ft Pent Shed


- x8 Blank (4ft Wide)
 - x4 Blank (2ft Wide)
 - x3 Window Panel (4ft Wide)
 - x1 Single Door Panel
 - x8 Pent Roof (4x5)
 - x2 Pent Roof (2x5)
 - x8 Floor (4x5)
 - x2 Floor (2x5)
 - x12 Felt Strips (4ft Wide)
 - x4 Felt Strips (2ft Wide)
 - x4 Floor Blocks (5ft Wide)
 - x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
 - x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
 - x4 Pent Roof Top (4ft)
 - x1 Pent Roof Top (2ft)
 - x12 Joining Strips
 - x4 Corner Strips
 - x33 Posts
 - x8 Diamond Caps
 - x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (19ft)
 - x1 Instruction Manual



Checked and Signed by:

19ft x 10ft Pent Shed


- x8 Blank (4ft Wide)
 - x2 Blank (3ft Wide)
 - x2 Blank (2ft Wide)
 - x3 Window Panel (4ft Wide)
 - x1 Single Door Panel
 - x8 Pent Roof (4x5)
 - x2 Pent Roof (3x5)
 - x8 Floor (4x5)
 - x2 Floor (3x5)
 - x12 Felt Strips (4ft Wide)
 - x2 Felt Strips (3ft Wide)
 - x2 Felt Strips (2ft Wide)
 - x4 Floor Blocks (5ft Wide)
 - x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
 - x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
 - x4 Pent Roof Top (4ft)
 - x1 Pent Roof Top (3ft)
 - x12 Joining Strips
 - x4 Corner Strips
 - x35 Posts
 - x8 Diamond Caps
 - x1 Fixing Kit
(Found in the polytube pack)
- x1 Instruction Manual
 - x1 Roof Rubber (20ft)

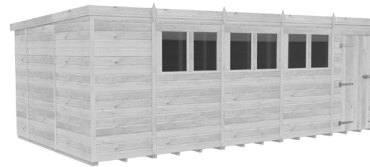

Checked and Signed by:

20ft x 10ft Pent Shed

- x9 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x4 Window Panel (4ft Wide)
- x1 Single Door Panel
- x10 Pent Roof (4x5)
- x10 Floor (4x5)
- x14 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x1 Pent Angle Top - Left (10ft Wide) (4ft + 6ft)
- x1 Pent Angle Top - Right (10ft Wide) (4ft + 6ft)
- x4 Floor Blocks (5ft Wide)
- x5 Pent Roof Top (4ft)
- x12 Joining Strips
- x4 Corner Strips
- x35 Posts
- x8 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x1 Roof Rubber (21ft)
- x1 Instruction Manual

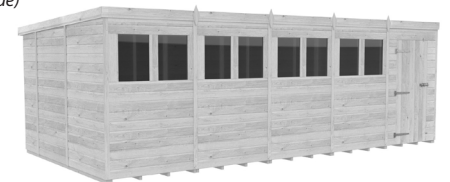


Checked and Signed by:

5ft & 5ft FLOOR PANEL

Turn all floor panels upside down so frame posts are exposed.



ASSEMBLING THE 10FT FLOOR

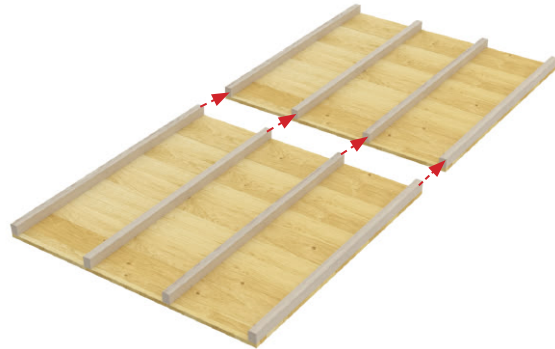

This process will be the same for any build this has a depth of 10ft. The 10ft will be constructed using two 5ft sections.

Before attaching the floor sections, you must first attach the frame posts provided. These will add strength to the roof and will make the process of adding the floor much easier.

Next, Use the screws provided to attach the frame posts to the floor sections. Screw a minimum of 4 screws into each of the frame posts.



INFORMATION

It is recommended that you turn the Floor section 180 degrees so that the bottom of the floor is as shown.

● = Drill Points using screws provided as shown




5ft & 5ft ROOF PANEL

Turn all roof panels upside down so frame posts are exposed.



ASSEMBLING THE 10FT ROOF

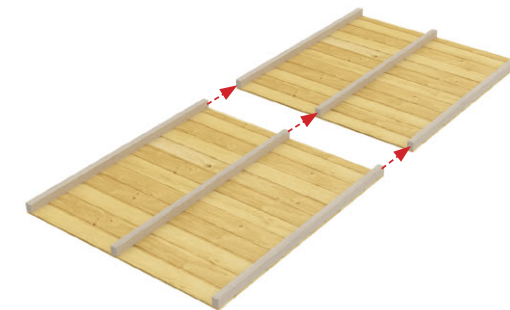

This process will be the same for any build this has a depth of 5ft. The 5ft will be constructed using two 4ft sections.

Before attaching the roof sections, you must first attach the frame posts provided. These will add strength to the roof and will make the process of adding the roof much easier.

Next, Use the screws provided to attach the frame posts to the floor sections. Screw a minimum of 4 screws into each of the frame posts.



REMEMBER Do not screw the 100mm screws all the way through, just enough for the frame post and post to attach.

● = Drill Points using screws provided as shown



COMPOSITE SHEDS

PRE-ASSEMBLY

Unpacking your Parts

Unpack all of the components and check that you have all the parts required. Please use the checklist on previous page.

Carefully dispose of the delivery pallet and any excess timber.

Advisable: The underside of the floor must be treated with a quality wood preserver.

SET THE SHED FOUNDATION

This Manuals Diagrams are based on the **6ft x 10ft Pent Shed**



COMPOSITE SHEDS

STEP • 1


Recommended: Paint shed in an oil based treatment to prevent water ingress into the timber. Also silicon your windows (*Must silicon inside & outside*) to prevent rain water seeping through the gaps between glass and the timber.




SHED FLOOR: Setting Shed Base

1a. Secure the **Floor Panels** sections together by screwing the floor bearers at each end where they meet as shown in diagram 1a.

2b. In this example, the shed starts off with a smaller floor panel. With some other sizes, you will begin with a 4ft Floor Panel on the left, and the smaller Floor Panel (2ft or 3ft) will be at the very right of the build. Check the floor plan to the left if needed.

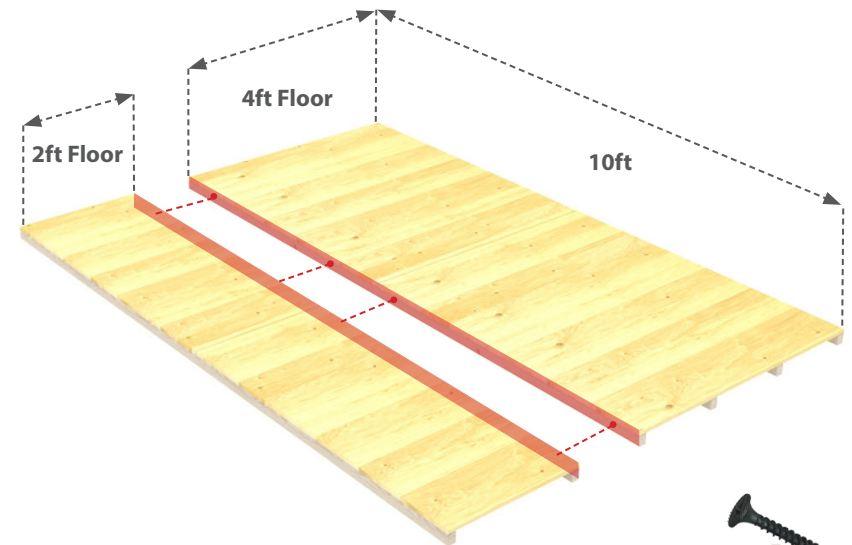

● = Drill Points using screws provided as shown

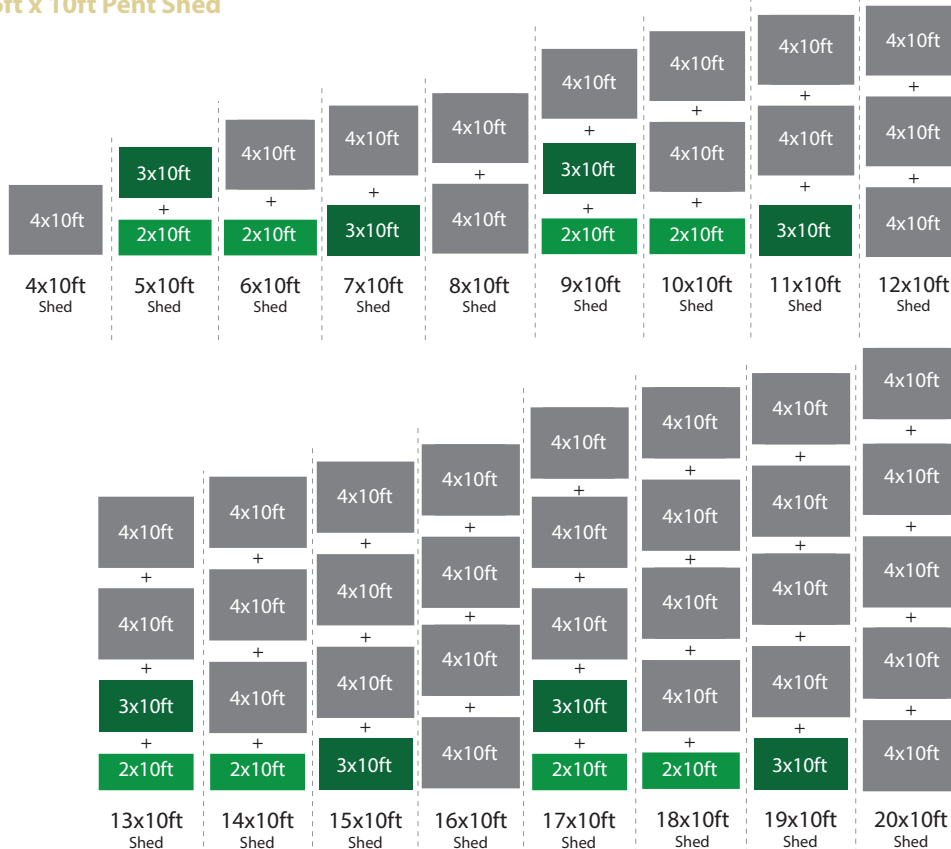

IMPORTANT

All Sheds With 4 or More Floor Pannels have the smallest Floor Panel on the Right End.

As shown on this diagram.





FLOOR & BLOCK ENDS

Add the Floor Block Ends (Heavy Duty Posts)

2a. Place the 10ft (2x5ft) long Floor Block Ends provided on both ends of the floor alongside existing floor bearers as shown below.

2b. Fix together by screwing the Floor Blocks at each end as shown. Use the screws provided and make sure the ends are fixed securely. 3 screws on each end will suffice.

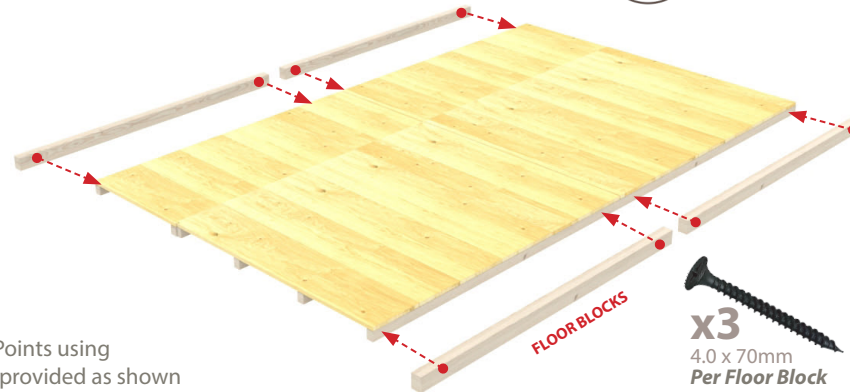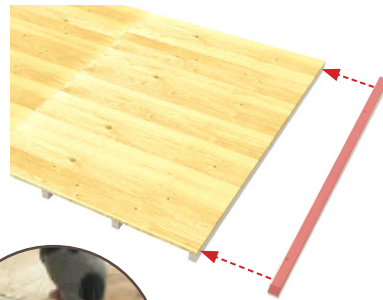

● = Drill Points using screws provided as shown

2ft LEFT SIDE PANEL

Place first panel againts far left of shed floor as shown.

(2ft wide blank panel)




2FT LEFT SIDE PANEL

3a. Place the 2ft Blank Panel against the far right side of the shed floor. Make sure the panel stands firmly on the Heavy Duty Post (Floor Block)

3b. Now prepare the 2ft Blank Panel in order to create an 'L' shape in the corner with the two panels.

3c. DO NOT fix the panels at this stage to the floor. This is because you need to leave room for adjustments in the final stages of the shed build.

REMEMBER The Panel should sit on the Floor Block.

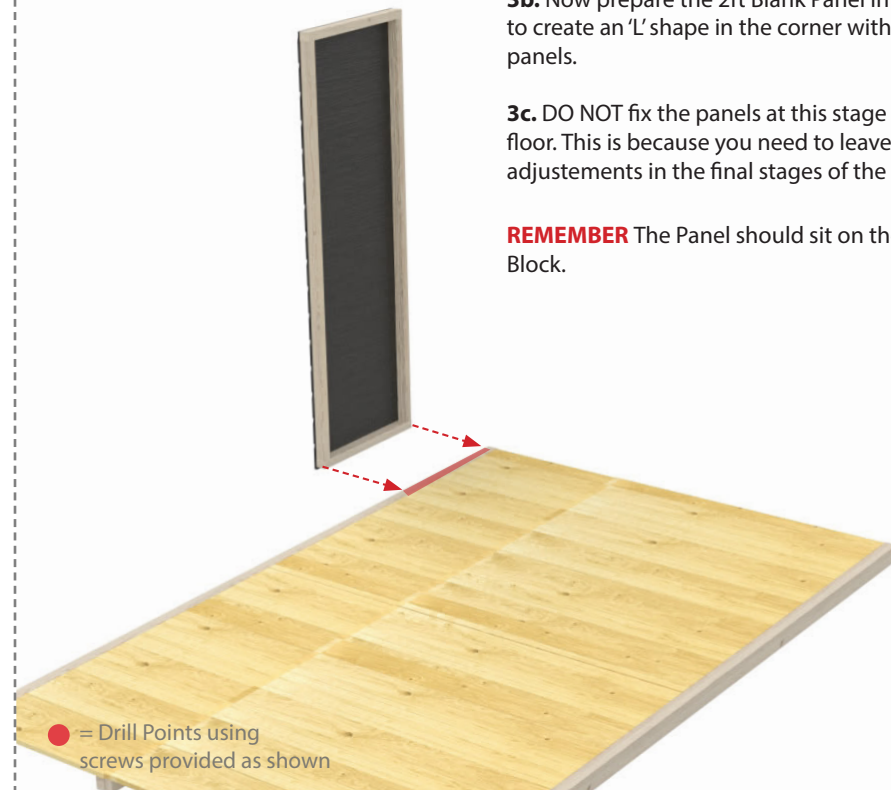

● = Drill Points using screws provided as shown

REAR PANELS


Fix 2ft and 4ft Wide Blank Sections. Create a Corner for Balance.

NOTE: Place panel to sit firmly on the side Floor Block.

REAR PANELS

4a. Place a 2ft Blank Panel side as shown below. Repeat this step for all larger sheds. Please use reference on left for additional sections required according to your shed size.

4b. Screw the panels alongside the framework.

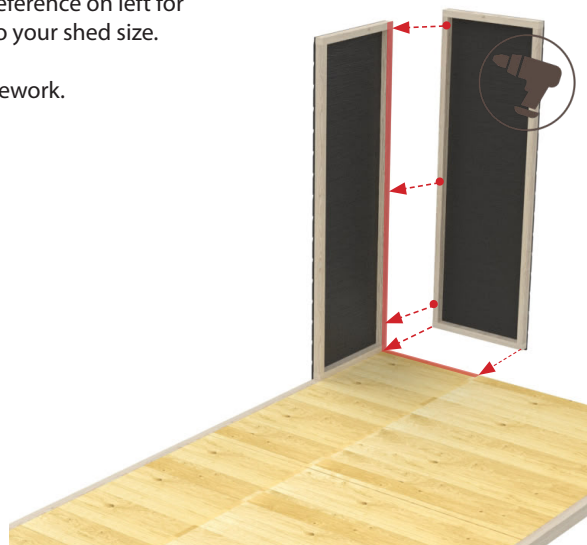

4c. Place the 4ft Blank Panel as shown along the side of the shed floor aligning with the edge of the side Floor Block. **REPEAT** this step until all back Blank Panels are in place.

INFORMATION

Not all Sheds will have the same panel arrangement. Please Ensure that the 4ft Panels are central for all builds.




4ft LEFT SIDE PANELS

Fix 4ft Wide Blank Section Side Panel 4ft (LEFT)



4ft LEFT SIDE PANELS

6a. Place the 4ft panel side against the corner of the back LEFT of the 2ft floor as shown making sure the panel is sitting firmly on the shed floor and the side meeting the framework of the back 4ft blank panel. Repeat this for the next 4ft Panel.

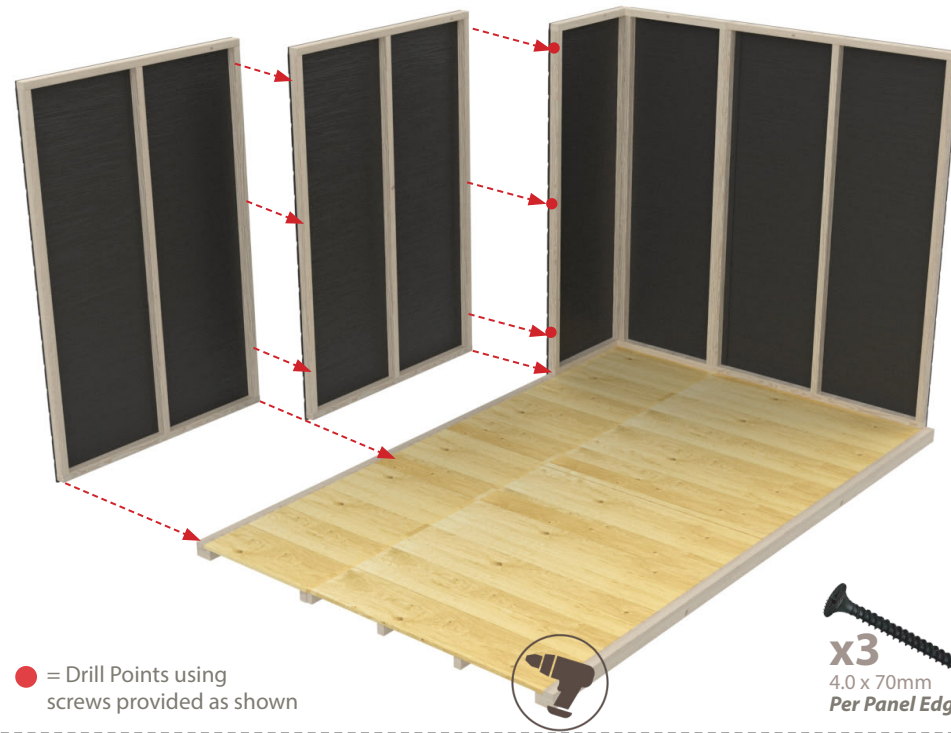

● = Drill Points using screws provided as shown




2ft RIGHT SIDE PANEL

Fix 2ft Wide Blank Section
Back Panel 2ft Section



4ft RIGHT SIDE PANEL

5a. Now place a 2ft **Blank Panel** as shown. Repeat this step for all other sheds. Please use reference on above for correct sections required according to your shed size.

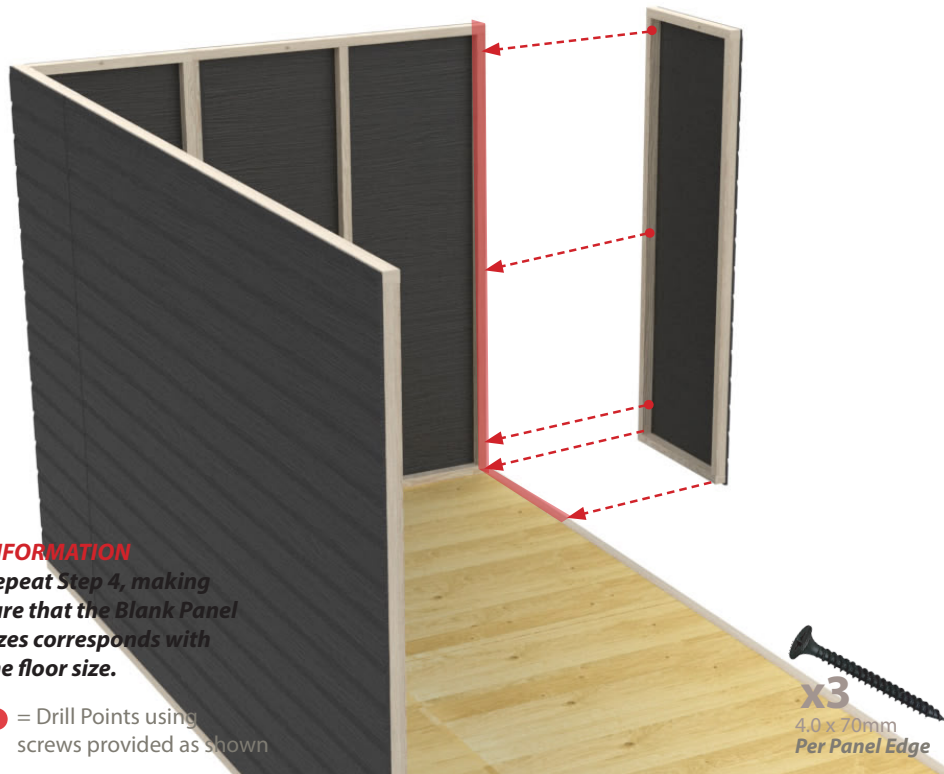

INFORMATION
Repeat Step 4, making sure that the Blank Panel sizes corresponds with the floor size.


● = Drill Points using screws provided as shown

4ft WINDOW SIDE PANEL

Attach 4ft Window Section to the Right Side Wall



4ft WINDOW SIDE PANEL

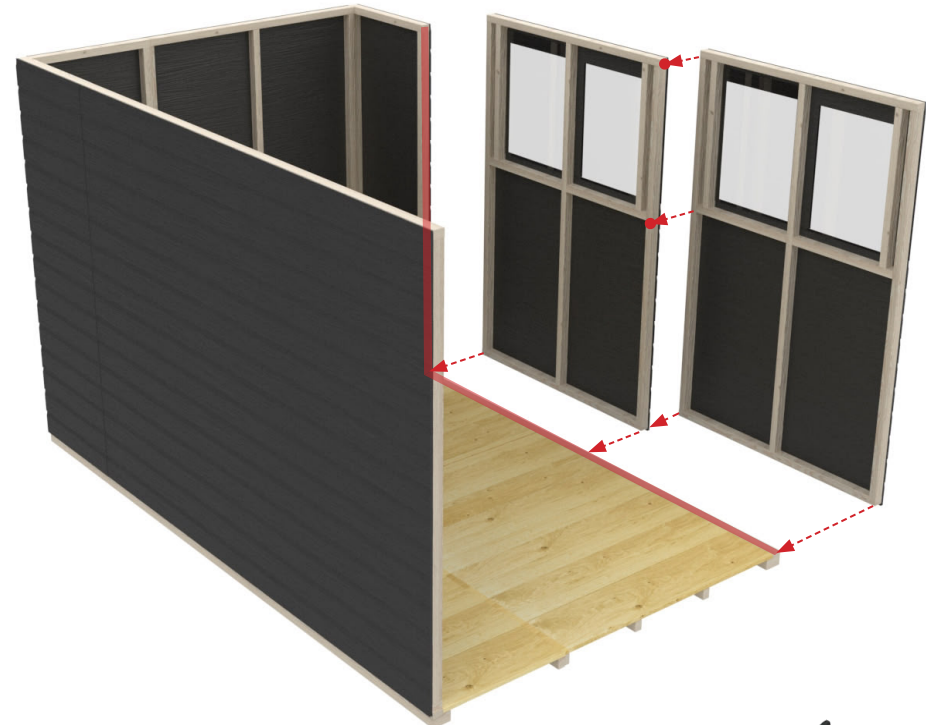

DO NOT screw the standing panels down to the floor just yet. Leave room for adjustments when the final frame is fitted.

● = Drill Points using screws provided as shown


FRONT 2FT PANEL

Attach Front Panel
(2ft Blank Panel)



FRONT 2FT BLANK PANEL

8a. Place the 2ft Blank Panel against the corner of the left 4ft Window Panel and on the 4ft Floor as shown making sure the panel is sitting firmly on the shed floor and the side meeting the framework of the left 4ft Window panel.

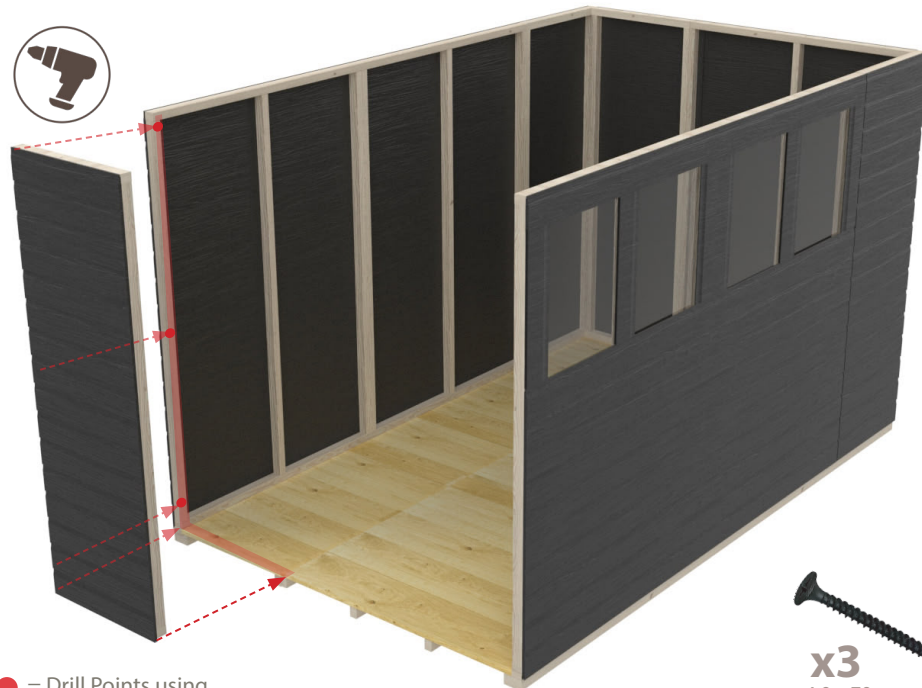

● = Drill Points using screws provided as shown



FRONT DOOR PANEL


Attach Front Door Panel
(4ft Door Panel)



4ft DOOR PANEL

9a. Now place the 4ft Door Panel as shown. Fix together with screws to the right side panel framework.

DID YOU KNOW?
Door panels can be placed anywhere a 4ft panel is. The 4ft Door must be placed opposite the 4ft back panel and on top of a 4ft floor.

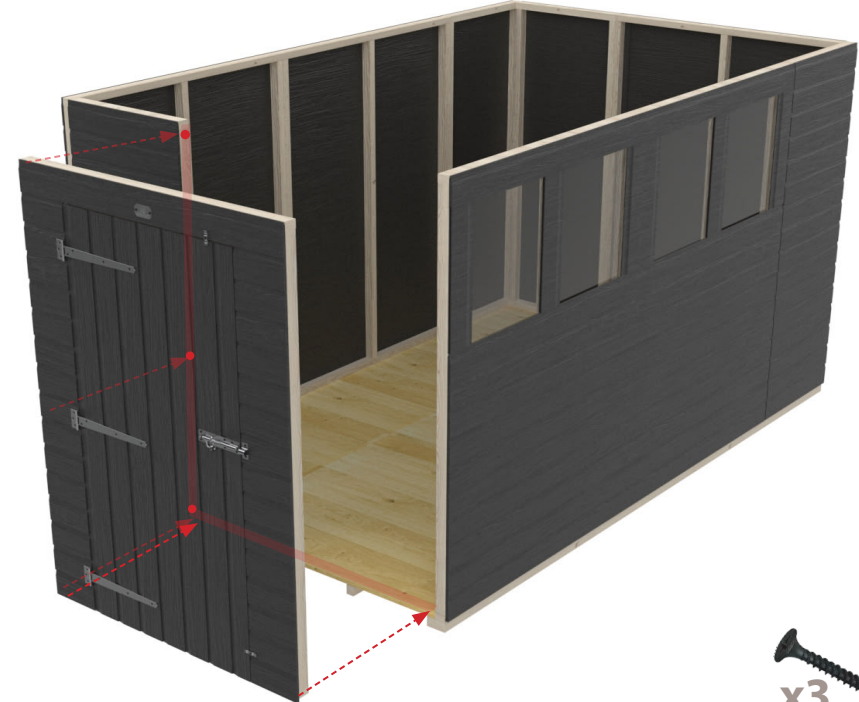

● = Drill Points using screws provided as shown




SIDE PENT ANGLE TOPS

Now attach all the 10ft Side Tops of Pent Shed End Panels. (Over the top of both side panels).



10ft SIDE PENT ANGLE TOPS

10a. Now place the 6ft and 4ft slope together and use two 70mm screws to secure them together, making sure that they are in line.

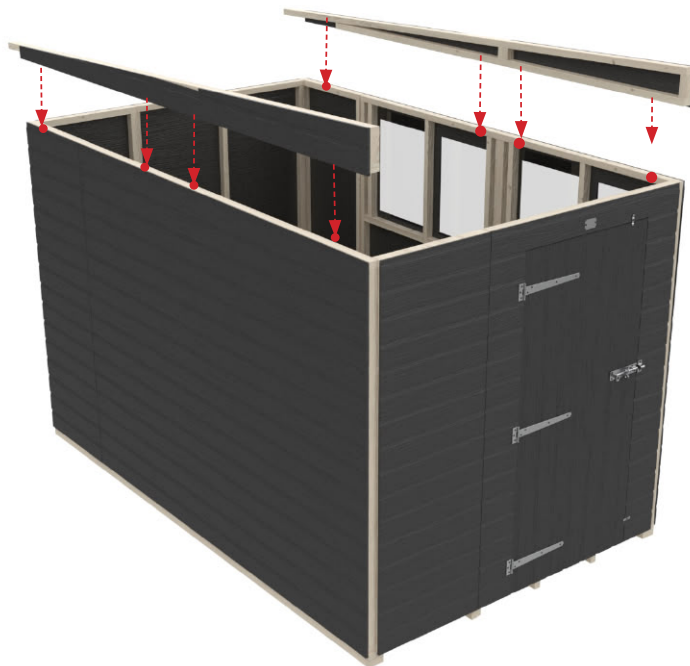

10b. Once the Pent Angle Top has been constructed, use the screws to secure the Angle Tops to the sides of the Shed.



● = Drill Points using screws provided as shown

PENT FRONT TOPS

Place the front tops of shed in relation to the fronts panels



PENT FRONT TOPS


11a. Place the Pent Front Top sections in place. Use the corresponding sized tops with the correct sections. Make sure the correct section is placed on top of the correct front panel only as shown in the diagram.

11b. Adjust the panels so that the tongue & groove are fixed together in place correctly. Use a hammer to lightly tap in to the grooves to create a perfect fit.

11c. Attach the sections down by screwing through the inner framework of both panels.

INFORMATION :

Place the 4ft Pent Front Top on top of the 4ft Door panel (Each Pent Front Top should be placed on top of the correct sized front panel)

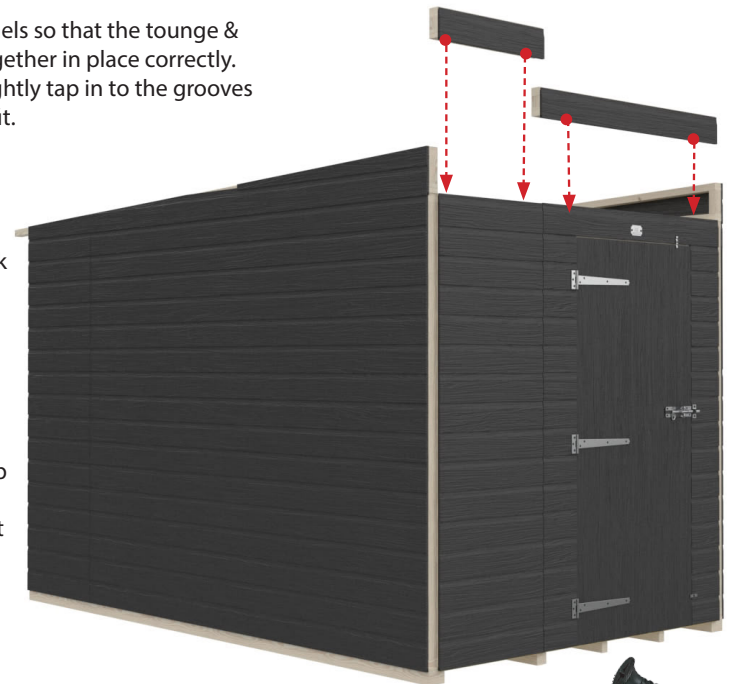

● = Drill Points using screws provided as shown

PENT ROOF PANELS

Place 4ft Roof section.
Repeat for all Roof Panels (2ft)



PENT ROOF PANELS


12a. Place the 4f Roof Panel in place. Repeat this stage for models as shown below. Repeat placing the roof panels corresponding to the panel size for the Floor Front an Rear.

12b. Screw the Roof Panel down by screwing into the sides of the frame posts. The Roof Panels will sit nicely inside of the Angle Tops as shown the next step.

Repeat this for all roof panels, making sure each panel is sitting on its corresponding sized front/back panel.

INFORMATION
Use these 100mm screws to secure the Roof panels together.

x4
4.0 x 100mm
Per Roof Panel

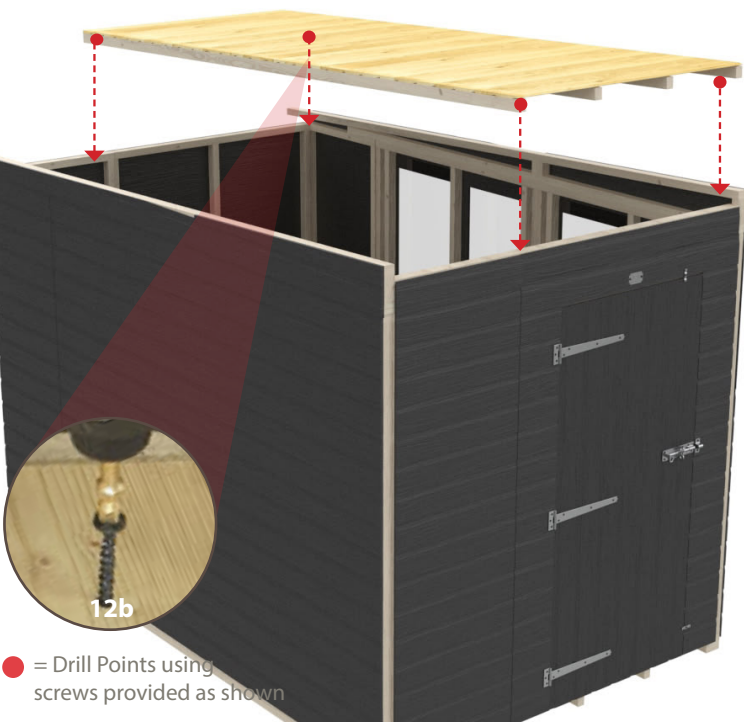

● = Drill Points using screws provided as shown

JOININGSTRIPS

Hide the panel edges.
Cover the framework & seams.



JOINING STRIPS

13a. Use all the joining strips to finish off the shed, by covering any panel joining seams.

13b. Fix the strips down by using 5 poly pins to secure them to the Shed. This will create a nice finish and hide any gaps on the outer walls of framework, front and back.



● = Drill Points using screws provided as shown

x5
Per Corner Strip



CORNER STRIPS

Hide the panel edges. Cover the framework & seams.



CORNER STRIPS

14a. Use all the side/corner strips to finish off the shed, by covering any exposed framework.

14b. Fix the strips down by using 5 poly pins to secure them to the **Shed**. This will create a nice finish and hide any gaps on the outer walls of framework, front and back.



● = Drill Points using screws provided as shown



ATTACH THE ROOF RUBBER Use the felt lengths provided.



ROOF RUBBER

15a. Apply the roof rubber as shown.

15b. Use the spray glue provided to adhere the rubber to the roof. Once the rubber has been laid across the roof, fold in half and apply the glue.

15c. Using a hammer, tack down the rubber with the tacks provided in a neat fashion.



WARNING: The spray glue can be toxic. We advise that you wear a mask when applying.



TACKS PROVIDED

ATTACH ROOF STRIPS


Create the Final Roof Edges. Final steps finishing off the roof.



ROOF STRIPS

16a. Using the **Roof Strips** provided cover the edges of the roofs and ends of the roof rubber. You will need to measure these and saw to fit to your requirements and create the perfect roof finish as shown below.

16b. Drill in the felt strips as shown on front and back of the shed to finish the roof off. Use the framework of the roof blocks to screw the felt strips down to. The roof strips will give your shed a neat finish for the roof and hide any overhang areas of the roof rubber.

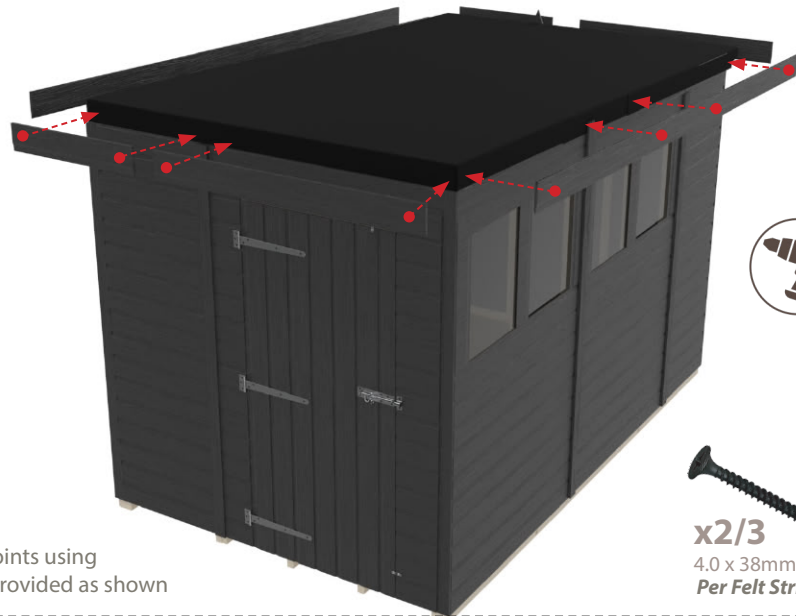

● = Drill Points using screws provided as shown

x2/3
4.0 x 38mm
Per Felt Strip

DIAMOND CAPS

Add the Finishing Touch. (Optional)



DIAMOND CAPS

Congratulations



Timber is a naturally grown product and may shrink and warp when dried out, timber is a porous material which can absorb water. Although all of our buildings come pressure treated we strongly advise the building is re-treated with an oil/spirit based treatment inside and out to make the timber water repellent and to preserve the quality and life of the product.

x1
4.0 x 38mm
Per Diamond Cap